


## Brass cage single row angular contact ball bearing C (15°) AC (25°)

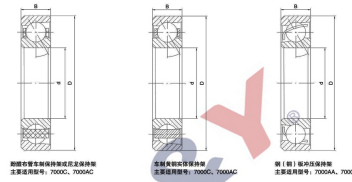

Designation	Principal Dimensions			Basic Load Ratings		Limited Speed		Weight Mass [kg]	
	d	D	B	Cor.	Cr.	grease	Oil		
7800C	10	19	5					0.005	
7000C	10	26	8	4.9	2.1	24000	32000	0.019	
7000AC	10	26	8	4.7	2.1	24000	32000	0.019	
7200C	10	30	9	5.8	2.9	22000	28000	0.032	
7200AC	10	30	9	5.5	2.8	22000	28000	0.032	
7200B	7200AA	10	30	9	5.3	2.7	19000	27000	0.03
7300C	10	35	11	9.8	4.6	18000	26000	0.053	
7300AC	10	35	11	9.5	4.4	18000	26000	0.053	
7801C	12	21	5					0.006	
7901C	12	24	6	3.3	1.8	28000	36000	0.011	
7901AC	12	24	6	3.2	1.7	28000	36000	0.011	
7001C	12	28	8	5.4	2.6	22000	28000	0.021	
7001AC	12	28	8	5.1	2.4	22000	28000	0.021	
7201C	12	32	10	7.9	3.8	20000	25000	0.037	
7201AC	12	32	10	7.6	3.6	20000	25000	0.037	
7201B	7201AA	12	32	10	6.9	3.2	18000	24000	0.036
7301C	12	37	12	11.8	5.6	17000	24000	0.06	
7301AC	12	37	12	11.5	5.4	17000	24000	0.06	
7301B	7301AA	12	37	12	10.5	4.9	16000	22000	0.06
7802C	15	24	5				—	0.007	
7902C	15	28	7	4.7	2.6	24000	32000	0.015	
7902AC	15	28	7	4.5	2.5	24000	32000	0.015	
7002C	15	32	9	6.2	3.3	19000	25000	0.03	

Brass cage single row angular contact ball bearing C (15°) AC (25°)

7002AC		15	32	9	5.9	3.2	19000	25000	0.03
7202C		15	35	11	9.2	4.9	17000	22000	0.045
7202AC		15	35	11	8.9	4.8	17000	22000	0.045
7202B	7202AA	15	35	11	7.9	4.2	16000	22000	0.045
7302C		15	42	13	13.2	6.7	15000	21000	0.084
7302AC		15	42	13	12.5	6.2	15000	21000	0.084
7302B	7302AA	15	42	13	12.4	6.5	14000	19000	0.08