



C-shaped iron cage single row angular contact ball bearing B (40°)

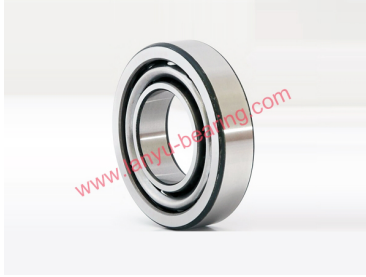

Designation		Principal Dimensions			Basic Load Ratings		Limited Speed		Weight	
		d	D	B	Cor.	Cr.	grease	Oil	Mass [kg]	
7800C			10	19	5					0.005
7000C			10	26	8	4.9	2.1	24000	32000	0.019
7000AC			10	26	8	4.7	2.1	24000	32000	0.019
7200C			10	30	9	5.8	2.9	22000	28000	0.032
7200AC			10	30	9	5.5	2.8	22000	28000	0.032
7200B	7200AA		10	30	9	5.3	2.7	19000	27000	0.03
7300C			10	35	11	9.8	4.6	18000	26000	0.053
7300AC			10	35	11	9.5	4.4	18000	26000	0.053
7801C			12	21	5					0.006
7901C			12	24	6	3.3	1.8	28000	36000	0.011
7901AC			12	24	6	3.2	1.7	28000	36000	0.011
7001C			12	28	8	5.4	2.6	22000	28000	0.021
7001AC			12	28	8	5.1	2.4	22000	28000	0.021
7201C			12	32	10	7.9	3.8	20000	25000	0.037
7201AC			12	32	10	7.6	3.6	20000	25000	0.037
7201B	7201AA		12	32	10	6.9	3.2	18000	24000	0.036
7301C			12	37	12	11.8	5.6	17000	24000	0.06
7301AC			12	37	12	11.5	5.4	17000	24000	0.06
7301B	7301AA		12	37	12	10.5	4.9	16000	22000	0.06
7802C			15	24	5				—	0.007
7902C			15	28	7	4.7	2.6	24000	32000	0.015
7902AC			15	28	7	4.5	2.5	24000	32000	0.015
7002C			15	32	9	6.2	3.3	19000	25000	0.03

C-shaped iron cage single row angular contact ball bearing B (40°)

7002AC			15	32	9	5.9	3.2	19000	25000	0.03
7202C			15	35	11	9.2	4.9	17000	22000	0.045
7202AC			15	35	11	8.9	4.8	17000	22000	0.045
7202B	7202AA		15	35	11	7.9	4.2	16000	22000	0.045
7302C			15	42	13	13.2	6.7	15000	21000	0.084
7302AC			15	42	13	12.5	6.2	15000	21000	0.084
7302B	7302AA		15	42	13	12.4	6.5	14000	19000	0.08