


Nylon cage single row angular contact ball bearing C (15 °) AC (25 °)

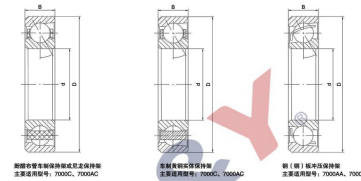

Designation		Principal Dimensions			Basic Load Ratings		Limited Speed		Weight Mass[kg]
		d	D	B	Cor.	Cr.	grease	Oil	
7800C		10	19	5					0.005
7000C		10	26	8	4.9	2.1	24000	32000	0.019
7000AC		10	26	8	4.7	2.1	24000	32000	0.019
7200C		10	30	9	5.8	2.9	22000	28000	0.032
7200AC		10	30	9	5.5	2.8	22000	28000	0.032
7200B	7200AA	10	30	9	5.3	2.7	19000	27000	0.03
7300C		10	35	11	9.8	4.6	18000	26000	0.053
7300AC		10	35	11	9.5	4.4	18000	26000	0.053
7801C		12	21	5					0.006
7901C		12	24	6	3.3	1.8	28000	36000	0.011
7901AC		12	24	6	3.2	1.7	28000	36000	0.011
7001C		12	28	8	5.4	2.6	22000	28000	0.021
7001AC		12	28	8	5.1	2.4	22000	28000	0.021
7201C		12	32	10	7.9	3.8	20000	25000	0.037
7201AC		12	32	10	7.6	3.6	20000	25000	0.037
7201B	7201AA	12	32	10	6.9	3.2	18000	24000	0.036
7301C		12	37	12	11.8	5.6	17000	24000	0.06
7301AC		12	37	12	11.5	5.4	17000	24000	0.06
7301B	7301AA	12	37	12	10.5	4.9	16000	22000	0.06
7802C		15	24	5				—	0.007
7902C		15	28	7	4.7	2.6	24000	32000	0.015
7902AC		15	28	7	4.5	2.5	24000	32000	0.015
7002C		15	32	9	6.2	3.3	19000	25000	0.03
7002AC		15	32	9	5.9	3.2	19000	25000	0.03

Nylon cage single row angular contact ball bearing C (15 °) AC (25 °)

7202C		15	35	11	9.2	4.9	17000	22000	0.045
7202AC		15	35	11	8.9	4.8	17000	22000	0.045
7202B	7202AA	15	35	11	7.9	4.2	16000	22000	0.045
7302C		15	42	13	13.2	6.7	15000	21000	0.084
7302AC		15	42	13	12.5	6.2	15000	21000	0.084
7302B	7302AA	15	42	13	12.4	6.5	14000	19000	0.08